

POLO

TECHNICAL PARAMETERS AND EQUIPMENT

Arena | Dino | **Polo** | Divan | Rondo | Master

Round Polo is a true classic commercial spa. Appreciated by the architects, Polo model is highlighted by elaborate design completed with elegant handrail. Safe entry to the spa is provided by steps with antislip surface. Ergonomically formed bench with water and air jets ensures a perfect comfort for 4 to 5 persons at the same time.

MODEL SPECIFICATION

Shell size	Ø 222 × 79 cm
Frame size	Ø 222 × 96 cm
Water volume	1100 l
Dry weight	210 kg
Filled weight	1310 kg
MassiveShell Construction	yes
color range	11+
Adjustable installation frame	yes
PU insulation	yes
Total seating	4-5
Outflow - overflow channels	yes
Number of outfalls	4
Bottom outlet / sand filtration discharge	yes

MASSAGE

Total number of jets	40
Water jets	27
Air jets	13

CONTROL

USSPA iNtelligSmart® electropack	yes
ISM® control system	yes
Control keypad on electropack	yes
Control via PC application (connection to local LAN needed)	yes
Selfdiagnostics with optional protocol	yes
Control of lifetime of selected components	yes
iNcontrol piezo buttons	3


TECHNOLOGY

Pump 1	1,5 kW + 3 HP
Commercial air blower	yes
Sand filtration	yes
Equalising tank	yes
Automatic water level sensor	yes
Automatic water refilling	yes
Heater	9 kW Titanium Coil
UV lamp	yes
Automatic chemistry dosing	yes
Flowmeter	yes
Light	yes

OTHER STANDARD EQUIPMENT

Handrail	1 / stainless
----------	---------------

We will be happy to present you with further options of accessories and services. Visit our showrooms.

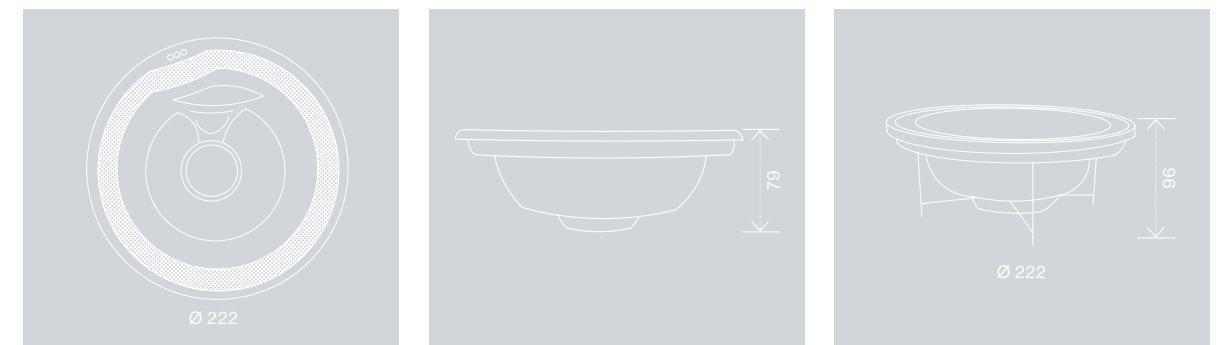

Electrical connections:

- for the massage technology connection - CYKY 5C x 2,5 circuit breaker 20 A char. "C", Current protector I_{Δn} = 0,03 A in the spa ground plan.
- for the filtration technology connection - CYKY 5C x 4 circuit breaker 25 A char. "C", Current protector I_{Δn} = 0,03 A in the filtration technology area.

